

GXR Series

High Frequency X-ray Generator

Superior performance and stability

Features

- Fully Automatic mA/kV Calibration
- Easy parameter setting and firmware upgrade
- System self-diagnosis function
- System quality maintenance via Remote Diagnosis
- Remote Diagnosis via internet reduces service cost and down time
- Tube overloading and housing overheating protection
- User-programmable anatomical programs
- Dual speed starter : Direct drive by 6-pack IPM circuit, dynamic brake



Options

- AEC (Automatic Exposure Control) Interface
- DR (Digital Radiography) Interface: SDK, PC interface module, Signal interface
- Pedestal Console Stand
- 23" Touch Screen Console




Touch Screen
X-ray Control Console



Specification

Model	GXR-32	GXR-40	GXR-52	GXR-68	GXR-82
Output Rating	32kW	40kW	52kW	68kW	82kW
Line Nominal, Phase	220-230VAC, 1Ø 380/400/480VAC, 3Ø		380/400/480VAC, 3Ø		
Line Voltage Range	±10% (Frequency: 50*/60Hz) *Outside North America				
kV Range	40~125kV, 1kV step (Optional 150kV)		40~150kV, 1kV step		
mA Range	10 to 400mA	10 to 500mA	10 to 640mA	10 to 800mA	10 to 1,000mA
Timer Range	0.001~10sec, 38 steps				
mAs Range	0.1 to 500mAs (Optional up to 1,000mAs)				
Max. Power Output	400mA@80kV 320mA@100kV 250mA@125kV 200mA@150kV	500mA@80kV 400mA@100kV 320mA@125kV 250mA@150kV	640mA@81kV 500mA@104kV 400mA@130kV 320mA@150kV	800mA@85kV 640mA@106kV 500mA@136kV 400mA@150kV	1,000mA@82kV 800mA@102kV 640mA@128kV 500mA@150kV
Rotor Supply	Low Speed Dual Speed (Option for 3Ø)		Low Speed Dual Speed (Option)	Dual Speed	
Reproducibility	Coefficient of Variation: kV<0.005, Time<0.005, mAs<0.01				
Accuracy	kV < ±(1%+1kV), mA < ±(3%+1mA), Time < ±(1%+0.5ms), mAs < ±(3%+0.1mAs)				
Linearity	Coefficient of Linearity < 0.01 : CL = (X1 - X2)/(X1+X2), where X is mR/mAs				
Anatomical Programs	User Programmable max. 1,280 programs with APR utility software				
Technique Selection	4 point display (kV, mA, Time, mAs)				
Image Receptors	2 Bucky + 1 Non-Bucky				
Auxiliary Power Supply	External System Power		230VAC, 1A, 230W (PBT-4) 230VAC, 2A, 460W (PBT-6)		
			110VAC, 1A, 110W		
	Magnetic Lock Power		28VDC, 6.3A, 176W		
	Collimator Lamp Power		24VAC, 6.3A, 150W		

Dimension

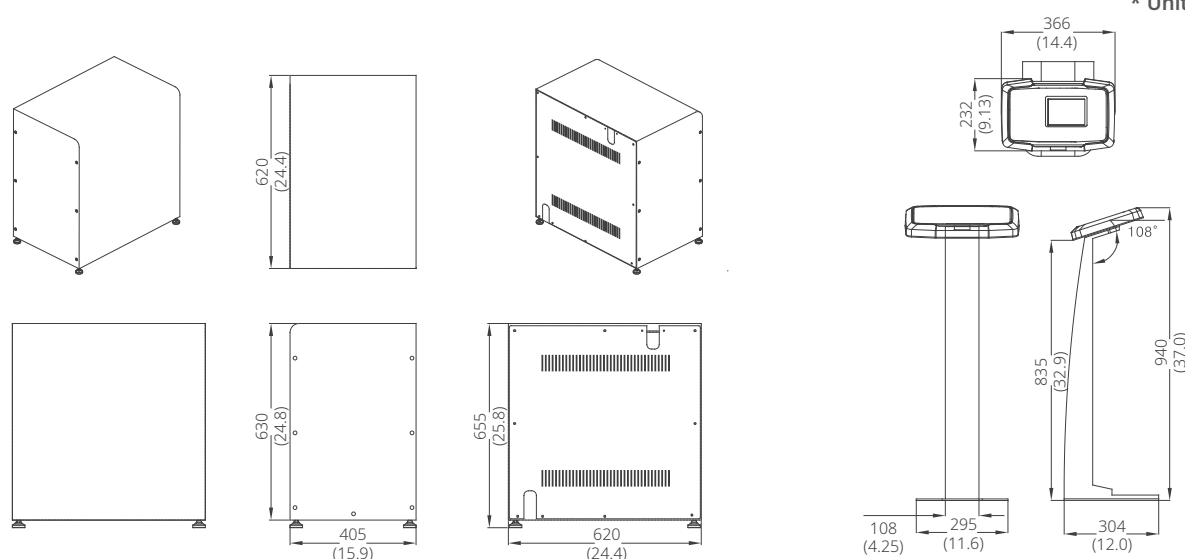

© DRGEM Corporation - All rights reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright-holder.
Specifications and features are subject to change without notice. All changes will be in compliance with regulations governing manufacture of medical equipment.